


Solvent-free, protective coating for concrete

weber.tec EP coating

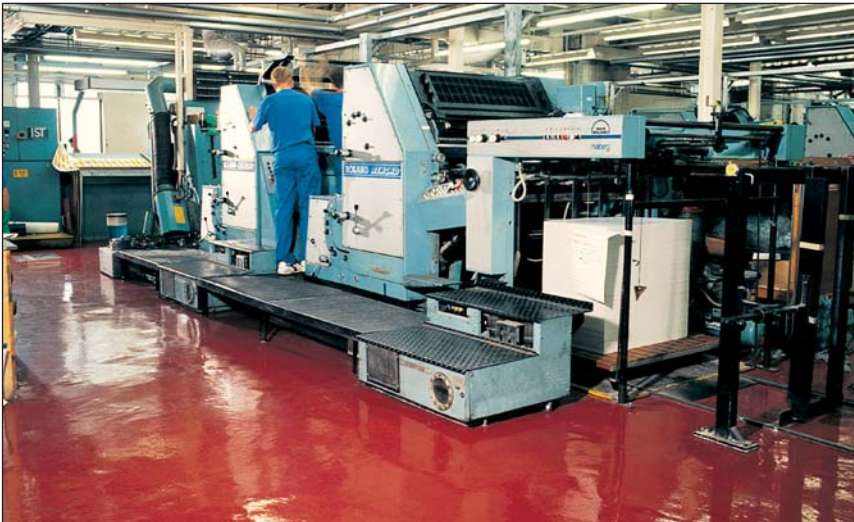

About this product

weber.tec EP coating is a high-quality, low-viscosity, two-component, solvent-free epoxy coating for application to new and existing concrete. It provides a smooth, easily cleaned surface which is resistant to dirt, moisture, oil and many aggressive chemical environments.

Technical data

Typical properties

All tests carried out at 20°C.

Tensile strength	22 N/mm ²	(BS 6319-7:1985)
Flexural strength	60 N/mm ²	(BS 6319-3:1983)
Flexural modulus	1200 N/mm ²	(BS 6319-6:1984)
Adhesion to good quality floor screed	6.5 N/mm ²	(BS EN ISO 4624:2003)
Adhesion to good quality concrete (concrete failure)	2.8 N/mm ²	(BS EN ISO 4624:2003)
Abrasion Taber, 200 cycles, wt. loss	20 mg	
Thickness (2 coats)	250 µm	
Density	1200 kg/m ²	(1.2 kg/litre)

Pot life

Temperature	Pot life	Thin film cure
5°C	240 min	24 hrs
10°C	75 min	12 hrs
20°C	40 min	5 hrs
25°C	25 min	3 hrs

Uses

- Hospitals
- Light industrial factories
- Garages
- Printing industry
- Bakeries
- Canning plants
- Assembly plants

Features and benefits

- ▲ Good chemical resistance
- ▲ Dustproof
- ▲ Good resistance light to medium traffic
- ▲ Easy to clean
- ▲ Can be made non-slip for wet areas
- ▲ Durable
- ▲ Will not harbour bacteria growth
- ▲ Decorative finish

Chemical resistance

Hydrochloric Acid	30%	Excellent
Sulphuric Acid	30%	Excellent
Sodium Hydroxide	30%	Excellent
Ammonia Solution	30%	Good
Citric Acid	30%	Excellent
Lactic Acid	30%	Good
Sugar Solution	50%	Excellent
Industrial Methylated Spirit		Good
Toluene		Fair
Petrol		Excellent
Engine Oil		Excellent

There was no discolouration of any specimens during chemical tests.

EU VOC regulations 2008

EU limit for weber.tec EP coating (cat A/j): 550 g/l (2007)/500 g/l (2010). **weber.tec EP coating** contains <160 g/l VOC.

weber.tec EP coating

Preparation

weber.tec EP coating can be applied to both new and existing concrete or cementitious toppings. New concrete should be at least 21 days old. The substrate must have a minimum compressive strength of 25 N/mm² and after preparation have a pull off strength of not less than 1.0 N/mm². The moisture content must not exceed 6% when tested with a Protimeter or have a relative humidity at the slab surface above 75% when tested with a hygrometer.

All oil and grease must be removed. Care must be taken to ensure oil and grease is removed and not simply spread over a large area.

Any spalled or damaged areas must first be repaired and brought level using a suitable repair compound such as **weber.cem pyrapatch**, **weber.cem pyratop** or **weber.tec EP mortar**.

A sound, freshly-exposed surface, free of laitance etc, should be obtained either by mechanical means, such as grit blasting, scabbling, bush hammering, or by acid etching, in which case the surface must be thoroughly washed and dried.

The importance of thorough preparation to produce the clean, freshly-exposed surface cannot be over emphasised. Inadequate preparation is likely to lead to a failure of bond.

On very poor substrates it may be necessary to consider the use of **weber.tec EP tackcoat** prior to the application of **weber.tec EP coating**.

Mixing

weber.tec EP coating is supplied as a two-part system comprising resin and hardener, which need to be thoroughly mixed together in the proportions supplied immediately prior to application.

Mixing should be carried out using a slow-speed stirrer or electric drill attachment.

Transfer to a shallow tray immediately after mixing to help dissipate heat and give a longer working time.

Technical services

Weber's Customer Services Department has a team of experienced advisors available to provide on-site advice both at the specification stage and during application. Detailed specifications can be provided for specific projects or more general works. Site visits and on-site demonstrations can be arranged on request.

Technical helpline

Tel: 01525 722137
Fax: 01525 718988

Application

The coating is applied by pouring onto small areas at a time, then spreading with a suitable brush or good quality foam-backed roller to achieve a smooth, even finish. If applied to the floor immediately after mixing, it will take about 5 hours to set depending on temperature. A second coat must be applied in the same manner once the material has set. If a non-slip finish is desired, a thin dusting of dry sand or grit may be sprinkled between coats. A further 24 hours should be allowed before permitting traffic. Maximum inter-coat time 24 hours.

When cured, **weber.tec EP coating** is not affected by water and frost. Consequently it can be used on surfaces which will ultimately be continually immersed in water. The material should not be applied in frosty weather or in temperatures below 5°C as this will increase the cure time beyond 24 hours, taking corrosion, water and frost resistant properties longer to develop.

Do not apply **weber.tec EP coating** over movement joints.

N.B. Areas to be coated should be in a dust-free environment.

Colours

weber.tec EP coating is supplied in the following standard colours:

Light grey RAL 7035
Mid grey RAL 7040

Additional colours to RAL standard, such as Red RAL 3009 and Beige RAL 1001, can be made subject to quantity and will carry a surcharge.

Cleaning

Brushes and tools should be cleaned immediately after use with **weber.tec solvent 3**.

Maintenance

In any flooring situation where chemical spillage or contact may occur, all chemicals should be removed immediately. To help extend the service life of the product, regular cleaning is recommended either by dry suction or water washing. Do not scrape or scour the surface. **Weber** flooring products are resistant to a wide range of detergents, disinfectants and floor cleaners. It is recommended that the customer conducts a trial on a small area before general use. Avoid the use of acid or oxidising cleaners.

Packaging

weber.tec EP coating is available in a 5 litre pack comprising resin and hardener.

Coverage

Approximately 20m² per 5 litre pack when applied in 2 coats on smooth dense concrete.

Dry Film Thickness: 250 µm in 2 coats.

Storage and shelf life

Store in cool, dry conditions between 5°C and 25°C. Shelf life in correct storage conditions is at least 12 months.

Health and safety

Contains epoxy constituents. Refer to information supplied by manufacturer (see Material Safety Data Sheet).

All skin contact with epoxy resin products should be avoided. Barrier creams should be used and operatives should wear protective clothing including gloves. Working areas should be well ventilated.

The hardener content is alkaline and labelled as corrosive. The resin content is labelled as an irritant. The flash point of all components is in excess of 100°C. In the event of fire use foam, dry chemical, carbon dioxide (CO₂) or water fog extinguishers.

For further information, please request the Material Safety Data Sheet for this product.

Sales enquiries

Weber products are distributed throughout the UK through selected stockists and distributors. Please contact the relevant Customer Services Team below for all product orders and enquiries.

England and Wales
Tel: 08703 330070
Fax: 01525 718988

Scotland, Northern Ireland, Isle of Man, Republic of Ireland
Tel: 028 9335 2999
Fax: 028 9332 3232

Saint-Gobain Weber Ltd

Dickens House, Enterprise Way, Maulden Road, Flitwick, Bedford MK45 5BY, UK
Tel: 08703 330070 Fax: (01525) 718988 e-mail: mail@netweber.co.uk
www.netweber.co.uk

To the best of our knowledge and belief, this information is true and accurate, but as conditions of use and any labour involved are beyond our control, the end user must satisfy himself by prior testing that the product is suitable for his specific application, and no responsibility can be accepted, or any warranty given by our Representatives, Agents or Distributors. Products are sold subject to our Standard Conditions of Sale and the end user should ensure that he has consulted our latest literature.