


*An external finish comprising natural aggregates bound in a clear resin binder*

# weber.tene SG

## plastene SG

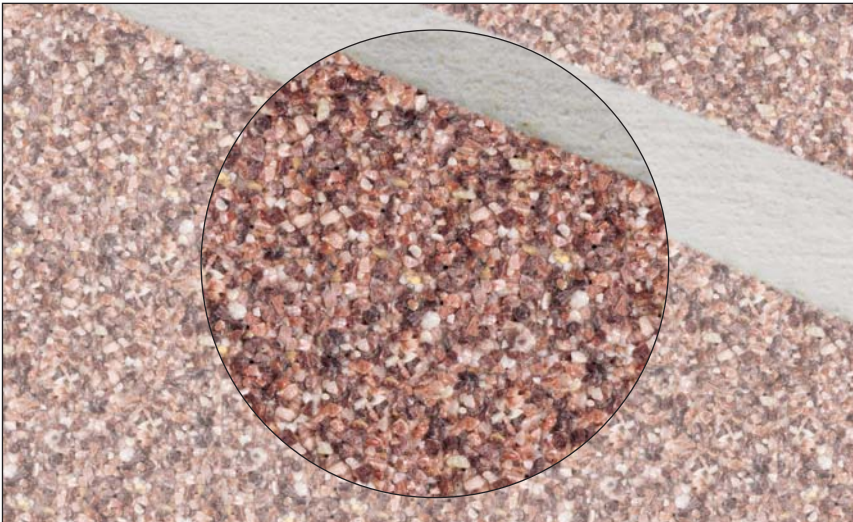

### About this product

**weber.tene SG** is a polymer-based decorative coating with a fine aggregate finish.

### Technical data

- As a decorative textured finish for application onto either a single coat or a 2-coat float finished render
- As a decorative textured finish for external wall insulation systems - **weber.therm XL** and **weber.therm XM**.

Insulation Board	Reinforcement	Fixing	1st Coat	2nd Coat	Finish
<b>weber.therm XL</b> Expanded polystyrene Mineral fibre – slab Mineral fibre – lamella	Metal lath – Ferritic stainless	Mechanical	<b>weber.rend TUC</b> <b>weber.rend PUC</b> or <b>weber.rend MFU</b>	<b>weber.rend TTC</b>	<b>weber PR330</b> <b>weber.tene SG</b>

<b>weber.therm XM</b> Expanded polystyrene Mineral fibre – slab Mineral fibre – lamella Phenolic foam	Meshcloth	Mechanical or <b>weber.rend LAC</b>	<b>weber.rend LAC</b>	N/A or <b>weber.rend PTC</b>	<b>weber PR330</b> <b>weber.tene SG</b>
---	-----------	--	-----------------------	---------------------------------	--

- As a decorative textured finish for multi-coat render systems – **weber.rend stipple** or **weber.rend IF**, lath and render

First Layer	Reinforcement	Fixing	1 st Coat	2nd Coat	Finish
<b>weber.rend stipple</b>	N/A	N/A	<b>weber.rend PUC</b>	<b>weber.rend TTC</b> or <b>weber.rend PTC</b>	<b>weber PR330</b> <b>weber.tene SG</b>
<b>weber.rend IF</b> membrane	Metal lath – Ferritic stainless	Mechanical	<b>weber.rend PUC</b>	<b>weber.rend TTC</b> or <b>weber.rend PTC</b>	<b>weber PR330</b> <b>weber.tene SG</b>

### Uses

- As a decorative coating for external and internal rendered walls
- As a finish on **Weber** External Wall Insulation Systems

### Constraints

Do not apply:

- On horizontal or sloping surfaces exposed to wet conditions
- Below DPC level
- On hot, damp or frozen/thawing surfaces
- During very humid weather conditions or if rain is forecast
- During extreme hot weather or when exposed to strong winds

The quality of application of this material depends on suitable operative skills and product familiarity.

Restrictions on weather conditions during application and curing must be respected.

Sound trade practices and printed instructions must be followed.

Good access and appropriate protection must be provided.

### Features and benefits

- Natural marble aggregates provide long lasting, durable finish
- Factory batched for consistency
- Available in a range of colours
- Practical benefits of ease of application, speed, economy and long shelf-life
- Technical support from a Quality Assured company
- Established track record in varying climatic conditions

### Colours

**weber.tene SG** is available in a range of 12 colours. Specifiers should consult the Colour Chart on page 26 of the specifiers' handbook **Weber Render Solutions** and, whenever possible, obtain samples prior to specification.

# weber.tene SG

## Preparation

Rendered substrates must be flat, clean, sound, dry and free of dust or other contamination.

On porous friable surfaces apply one coat of **weber SL410**. Allow to dry (between 4 – 6 hours) then prime with two coats of **weber PR330**. Allow to dry – 24 hours.

## Application

Plan and set out work bays approximately 20 m<sup>2</sup> with adhesive tape in order to disguise any potential day joints.

Apply **weber.tene SG** using a stainless steel trowel.

After a few minutes, smooth the surface to an even level using a stainless steel float.

The finished thickness is governed by the aggregate size i.e. approximately 3 mm.

When applying **weber.tene SG** on external angles, always start work from the edge.

Remove adhesive tape before the coating hardens.

Allow to dry out; the white polymer will be noticeable on the surface but will disappear as the coating dries out.

Apply in temperature (ambient and surface) between 5°C and 30°C.

Spillages stain and are difficult to remove so:

- protect vulnerable areas thoroughly
- wear protective clothing

Clean tools after use with water.

### Good practice

Do not apply:

- If frost is forecast within 24 hours of use
- In damp/wet conditions
- In temperatures below 5°C or above 30°C
- On elevations in direct sunlight or where the substrate is hot

## Packaging

**weber.tene SG** is packaged in 25 kg plastic containers with batch code and description on the side.

## Coverage

Use	Nominal thickness	Coverage
<b>weber.tene SG</b>	3 mm	5.5 – 6.5 kg/m <sup>2</sup>

**Note:** This estimate takes no account of wastage.

## Storage and shelf life

When stored airtight in a dry place at temperatures above 5°C and protected from frost, shelf life is 12 months from date of manufacture.

Do not over-stack.

## Health and safety

### **weber.tene SG** and **weber PR330**

Essentially not hazardous.

Not harmful during normal use.

After contact with skin, wash immediately with plenty of water.

In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.

Keep out of the reach of children.

### **weber SL410**

Contains low boiling point treated naphtha (white spirit).

Flammable.

Harmful: may cause lung damage if swallowed.

Do not breathe vapour. Avoid contact with skin and eyes. Wear suitable protective clothing, gloves and eye / face protection.

If swallowed, do not induce vomiting: seek medical advice immediately and show container or label.

**For further information, please request the Material Safety Data Sheets for these products.**

## Technical services

**Weber's** Customer Services Department has a team of experienced advisors available to provide on-site advice both at the specification stage and during application. Detailed specifications can be provided for specific projects or more general works. Site visits and on-site demonstrations can be arranged on request.

### Technical helpline

Tel: 01525 722137  
Fax: 01525 718988

## Sales enquiries

**Weber** products are distributed throughout the UK through selected stockists and distributors. Please contact the relevant Customer Services Team below for all product orders and enquiries.

### England and Wales

Tel: 08703 330070  
Fax: 01525 718988

### Scotland, Northern Ireland, Isle of Man, Republic of Ireland

Tel: 028 9335 2999  
Fax: 028 9332 3232

### Saint-Gobain Weber Ltd

Dickens House, Enterprise Way, Maulden Road, Flitwick, Bedford MK45 5BY, UK  
Tel: 08703 330070 Fax: (01525) 718988 e-mail: mail@netweber.co.uk  
www.netweber.co.uk

To the best of our knowledge and belief, this information is true and accurate, but as conditions of use and any labour involved are beyond our control, the end user must satisfy himself by prior testing that the product is suitable for his specific application, and no responsibility can be accepted, or any warranty given by our Representatives, Agents or Distributors. Products are sold subject to our Standard Conditions of Sale and the end user should ensure that he has consulted our latest literature.